



PPS EL Semilavorati Lastre estruse



ARTICOLO		DIMENSIONI / SIZES		
Spessore [mm]	PPS EL nero 2.710_005	Formato [mm]	Peso [Kg]	Conf. [Pz/Pc]
3	2.710.0003.005	1000x2000	7,04	5
4	2.710.0004.005	1000x2000	9,38	3
5	2.710.0005.005	1000x2000	11,70	3
6	2.710.0006.005	1000x2000	14,10	2
8	2.710.0008.005	1000x2000	18,80	2
10	2.710.0010.005	1000x2000	23,50	1
12	2.710.0012.005	1000x2000	28,10	1
15	2.710.0015.005	1000x2000	35,20	1
20	2.710.0020.005	1000x2000	46,90	1

ARTICOLO		DIMENSIONI / SIZES		
Spessore [mm]	PPS EL nero 2.720_005	Formato [mm]	Peso [Kg]	Conf. [Pz/Pc]
4	2.720.0004.005	1500x3000	21,10	1
5	2.720.0005.005	1500x3000	26,40	1
6	2.720.0006.005	1500x3000	31,70	1
8	2.720.0008.005	1500x3000	42,20	1
10	2.720.0010.005	1500x3000	52,70	1
12	2.720.0012.005	1500x3000	63,30	1
15	2.720.0015.005	1500x3000	79,10	1


**PPS EL
Semilavorati
Blocchi estrusi**

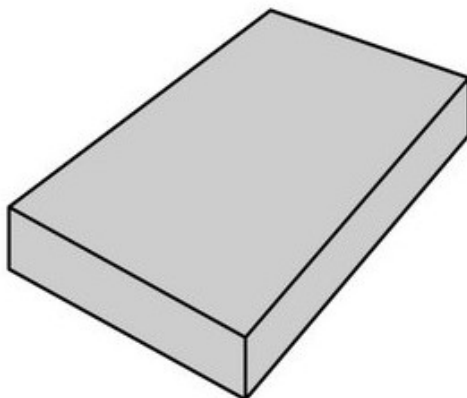

ARTICOLO		DIMENSIONI/SIZES		
Spessore [mm]	PPS EL nero 2.709.62_005	Formato [mm]	Peso [Kg]	Conf. [Pz/Pc]
50	2.709.6250.005	1000x620	38,84	5
80	2.709.6280.005	1000x620	61,46	5
120	2.709.6212.005	1000x620	91,62	5




PPS EL
Semilavorati
Lastre pressate



ARTICOLO		DIMENSIONI / SIZES		
Spessore [mm]	PPS EL nero 2.740_005	Formato [mm]	Peso [Kg]	Conf. [Pz/Pc]
20	2.740.0020.005	1000x2000	49,70	1
25	2.740.0025.005	1000x2000	61,50	1
30	2.740.0030.005	1000x2000	74,50	1
40	2.740.0040.005	1000x2000	98,10	1




PPS EL Semilavorati Filo di saldatura



ARTICOLO		DIMENSIONI / SIZES			
DE [mm]	PPS EL 2.795.0_005	Descrizione	Lunghezza [mt]	Peso [Kg]	Conf. [Pz/Pc]
3	2.795.0003.005	Filo di saldatura diametro 3 mm	319	3,00	2
4	2.795.0004.005	Filo di saldatura diametro 4 mm	185	3,00	2




PPS EL Semilavorati Bacchette di saldatura



ARTICOLO		DIMENSIONI / SIZES			
DE [mm]	PPS EL 2.795.2_005	Descrizione	Lunghezza [mt]	Peso [Kg]	Conf. [Pz/Pc]
3	2.795.2053.005	Piattina saldatura 5,5/3,00 mm	2	1,00	5

PPS EL
Semilavorati
Tondi pieni



ARTICOLO		SIZES				
DE [mm]	PPS EL nero 2.771_005	Tolleranza min [mm]	Tolleranza max [mm]	Lunghezza [m]	Peso [Kg]	Conf. [Pz/Pc]
20	2.771.0020.005	+0,2	+1,0	1000	0,37	1
65	2.771.0065.005	+0,3	+2,3	1000	3,91	1
80	2.771.0080.005	+0,4	+2,5	1000	5,93	1
100	2.771.0100.005	+0,6	+3,0	1000	9,27	1